

K-JANE HEAD

PRODUCT FEATURES

- Simple design style that doesn't minimize practical technology
- Pivots 220° on two axes and drops 1" below the Kable Lite system providing great light distribution
- Available in two on-trend finishes
- Available in four stem lengths for greater drop length control
- Ideal for commercial lighting applications
- Protected by a 1-year warranty



LAMPING

For cable separations of up to twice the length. Field-cuttable. Low-voltage, MR16 lamp of up to 75 watts (not included). For Kable Lite system only.

K-Jane Head



K-Jane Head

ORDERING INFORMATION

700KJAN	LENGTH (A)	FINISH
	05 5"	S SATIN NICKEL
	12 12"	
	24 24"	

700KJAN


JOB NAME _____

NOTES _____



SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Glass
NET WEIGHT	0.15 lbs
HEIGHT	5in
WIDTH	1in
LENGTH	1in
BEAM SPREAD	
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
MIN. HANGING HEIGHT	
MAX HANGING HEIGHT	
TOTAL CORD LENGTH	
SLOPED CEILING ADAPTABLE?	No
GENERAL LISTING	ETL Listed
INCLUDES	

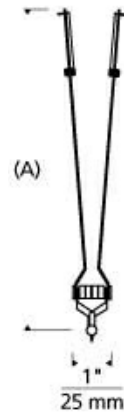

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				75W
INPUT VOLTAGE				12V
DIMMING TYPE*				ELV
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				GU5.3
LAMP SHAPE				BT15
LAMP INCLUDED?				N
WARRANTY**				1 Year

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

