

Combining modern geometric design with unique diffuser materials, the Lyft wall sconce features a clear acrylic diffuser that adds sparkle to the illuminated area with highly effective light distribution. Available in two size and three finishes.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### SPECIFICATIONS

DELIVERED LUMENS	215
WATTS	9.9
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K, 3000K or 4000K
CRI	80
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	5.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



LYFT 12  
shown with  
clear lens, bronze




LYFT 12  
shown with  
clear lens, charcoal

### ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
<b>700OWLYT</b>	<b>827</b> 80 CRI, 2700K <b>830</b> 80 CRI, 3000K <b>840</b> 80 CRI, 4000K	<b>12</b> 12"	<b>C</b> CLEAR	<b>B</b> BLACK <b>Z</b> BRONZE <b>H</b> CHARCOAL	<b>UNV</b> 120V-277V	<b>S</b> SYMMETRIC	<b>NONE</b> <b>LF</b> IN-LINE FUSE <b>SP</b> SURGE PROTECTION <b>LFSP</b> IN-LINE FUSE & SURGE PROTECTION

# LYFT 12 CLEAR WALL SCONCE

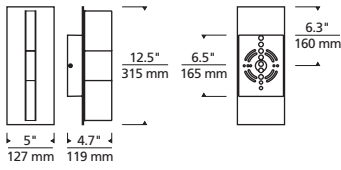


Lyft 12

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### LYFT 12 CLEAR

Total Lumen Output: 215  
 Total Power: 9.9  
 Luminaire Efficacy: 21.5  
 Color Temp: 3000K  
 CRI: 80  
 BUG Rating: B0-U3-G1

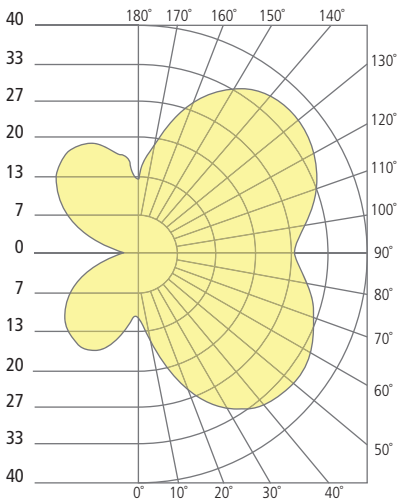

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.